

12W Single/Dual USB Charger Adapter Emulator

DESCRIPTION

The UC2633/UC2634 is single/dual USB adapter emulators with automatic host charger identification circuitry for USB dedicated chargers.

The devices integrated automatic USB charger identification circuit allow mobile power supply, In-Car charger, USB wall adapters, travel chargers, and other dedicated chargers to identify themselves as a USB dedicated charger to USB devices, like Apple charger to Apple products, Samsung charger to Samsung Galaxy Tab & Smart Phone, and BC1.2 charger to HTC, SONY, LG, BlackBerry, Lenovo, Coolpad, ZTE, Huawei and other legacy D+/D- short detection devices.


FEATURES

- 4.5V~5.5V Single Supply Operation.
- Automatic USB charger Identification Circuit.
- UC2633/UC2634 Support Apple® Devices fast charging. (Apple® 2.4A mode)
- Support Samsung Galaxy Tab Devices fast Charging. (Samsung® 2.1A mode)
- Support BC1.2 & YD/T 1591-2009 Charging Spec. (DCP® 1.0A mode)
- Available in SOT23-6 Package.

APPLICATIONS

Power Bank/Car Charger
 USB Wall Adapter
 Travel Charger

PACKAGE AND APPLICATION

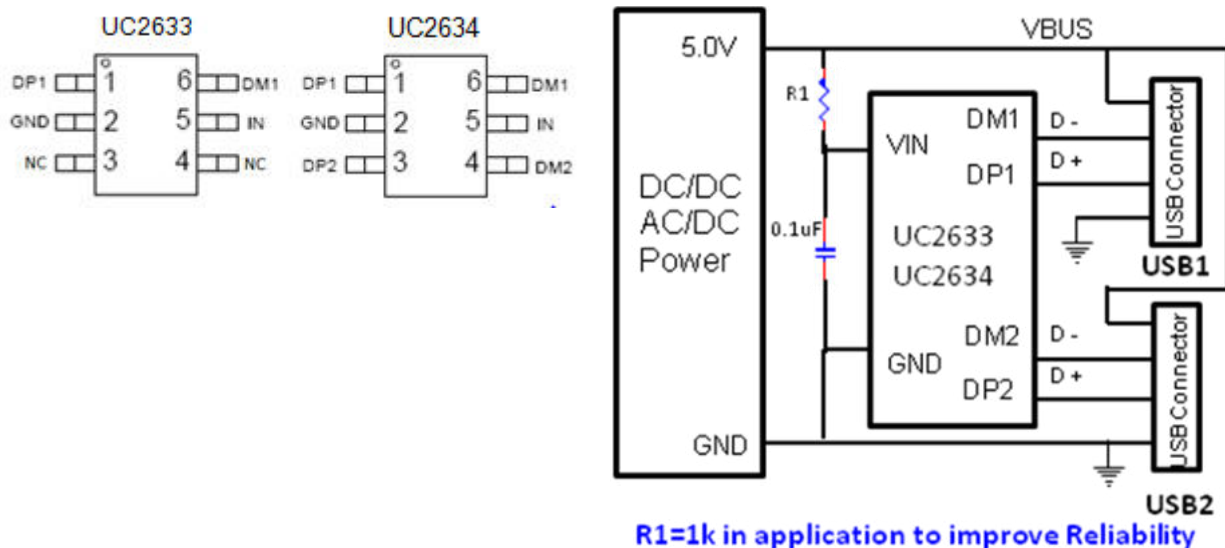

12W Single/Dual USB Charger Adapter Emulator


PART NO. TABLE

| Part No. | Dual/Single | Apple 12W | Apple 10W | Apple 5W | SS 10W | DCP 5W |
|----------|-------------|-----------|-----------|----------|---------|---------|
| UC2633 | Single | Support | | | Support | Support |
| UC2634 | Dual | Support | | | Support | Support |

ORDERING INFORMATION

| Part Number | Package Type | Package Qty | Op Temp(°C) |
|-------------|--------------|-------------|-------------|
| UC2633 | SOT23-6 | 3000 | -40~85 |
| UC2634 | SOT23-6 | 3000 | -40~85 |

MARK INFORMATION



12W Single/Dual USB Charger Adapter Emulator

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

Over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | MIN | MAX | UNIT |
|------------------------------------|--|------|-----|------|
| supply voltage range | IN | -0.3 | 6 | V |
| Input voltage range | DP1,DM1,DP2,DM2 | -0.3 | 5.8 | |
| Continuous output sink current | DP1,DP2 input current, DM1,DM2 input current | | 35 | mA |
| Continuous output source current | DP1,DP2 output current, DM1,DM2 output current | | 35 | |
| ESD rating, Human Body Model (HBM) | IN | | 8 | kV |
| | DP1,DP2,DM1,DM2 | | 8 | |
| Operating Junction Temperature | T _J | -40 | 125 | °C |
| Storage Temperature Range | T _{stg} | -65 | 150 | |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

THERMAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

| THERMAL METRIC | | | UNIT |
|----------------|--|-----|------|
| θ_{JA} | Package thermal impedance ⁽¹⁾ | 180 | °C/W |


(1) The package thermal impedance is calculated in accordance with JESD 51-7.

RECOMMENDED OPERATING CONDITIONS

| PARAMETER | | MIN | MAX | UNIT |
|----------------------|--------------------------------|-----|-----|------|
| V _{IN} | Input voltage of IN | 4.5 | 5.5 | V |
| V _{DP1/DP2} | D+ data line input voltage | | 5.5 | |
| V _{DM1/DM2} | D- data line input voltage | | 5.5 | |
| I _{DP1/DP2} | Continuous sink/source current | | ±10 | mA |
| I _{DM1/DM2} | Continuous sink/source current | | ±10 | |
| T _J | Operating Junction Temperature | -40 | 125 | °C |

PINOUT

12W Single/Dual USB Charger Adapter Emulator

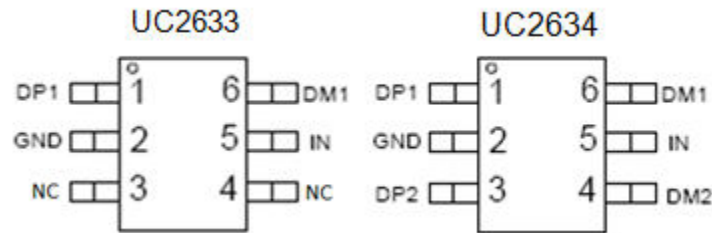

PIN FUNCTIONS

| NO. | NAME | TYPE ⁽¹⁾ | DESCRIPTION |
|-----|--------------|---------------------|--|
| 1 | DP1 | O/I | DP data line to connector, output for hand-shake voltage to portable equipment, high impedance while disabled |
| 2 | GND | G | Ground connection |
| 3 | NC (UC2633) | NC | No Connection |
| | DP2 (UC2634) | O/I | DP data line to connector, output for hand-shake voltage to portable equipment, high impedance while disabled |
| 4 | NC (UC2633) | NC | No Connection |
| | DM2 (UC2634) | O/I | DM data line to connector, input for hand-shake voltage from portable equipment high impedance while disabled |
| 5 | IN | P/I | Power supply/Input voltage connected to Power Switch; connect a 1 μ F or greater ceramic capacitor from IN to GND as close to the IC as possible |
| 6 | DM1 | O/I | DM data line to connector, input for hand-shake voltage from portable equipment high impedance while disabled |

(1) G = Ground, I = Input, O = Output, P = Power

12W Single/Dual USB Charger Adapter Emulator


ELECTRICAL CHARACTERISTICS

Conditions are $-40^{\circ}\text{C} \leq (T_J = T_A) \leq 125^{\circ}\text{C}$ and $4.5\text{ V} \leq V_{IN} \leq 5.5\text{ V}$ unless otherwise noted. Typical value is at 25°C . All voltages are with respect to GND unless otherwise noted.


| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------------|--|--|------|-----|------|------------------|
| UNDERVOLTAGE LOCKOUT | | | | | | |
| V_{UVLO} | IN rising UVLO threshold voltage | | 3.9 | 4.1 | 4.3 | V |
| | Hysteresis | | | 100 | | mV |
| SUPPLY CURRENT | | | | | | |
| I_{IN} | IN supply current | | | 160 | 300 | μA |
| BC 1.2 DCP MODE (SHORT) | | | | | | |
| R_{DPM_SHORT} | DP / DM shorting resistance | $V_{D+} = 0.8\text{V}$, $I_{D-} = 1\text{mA}$, | | 125 | 200 | Ω |
| R_{DCHG_SHORT} | Resistors connected DP /DM to GND after hand-shaking | $V_{D+} = 0.8\text{V}$ | | 200 | 400 | $\text{k}\Omega$ |
| $V_{DPL_TH_DETACH}$ | DP low threshold while detaching BC1.2 devices | | 310 | 330 | 350 | mV |
| $V_{DPL_TH_DETACH_HYS}$ | hysteresis | | | 50 | | mV |
| IPAD MODE(UC2633/UC2634) | | | | | | |
| V_{DP_IPAD} | DP1/DP2 output voltage | $V_{IN}=5.0\text{V}$ | 2.55 | 2.7 | 2.85 | V |
| V_{DM_IPAD} | DM1/DM2 output voltage | $V_{IN}=5.0\text{V}$ | 2.55 | 2.7 | 2.85 | V |
| R_{DP_IPAD} | DP1/DP2 output impedance | $V_{IN}=5.0\text{V}$, $I_{D+} = -5\mu\text{A}$ | 20 | 30 | 40 | $\text{k}\Omega$ |
| R_{DM_IPAD} | DM1/DM2 output impedance | $V_{IN}=5.0\text{V}$, $I_{D-} = -5\mu\text{A}$ | 20 | 30 | 40 | $\text{k}\Omega$ |
| Galaxy Tab MODE | | | | | | |
| V_{DP_GAL} | DP1/DP2 output voltage | $V_{IN}=5.0\text{V}$ | 1.1 | 1.2 | 1.3 | V |
| V_{DM_GAL} | DM1/DM2 output voltage | $V_{IN}=5.0\text{V}$ | 1.1 | 1.2 | 1.3 | |
| R_{DP_GAL} | DP1/DP2 output impedance | $V_{IN}=5.0\text{V}$, $I_{D+} = -5\mu\text{A}$ | 80 | 105 | 130 | $\text{k}\Omega$ |
| R_{DM_GAL} | DM1/DM2 output impedance | $V_{IN}=5.0\text{V}$, $I_{D-} = -5\mu\text{A}$ | 80 | 105 | 130 | |

FUNCTIONAL BLOCK DIAGRAM

UC2633 Block Diagram

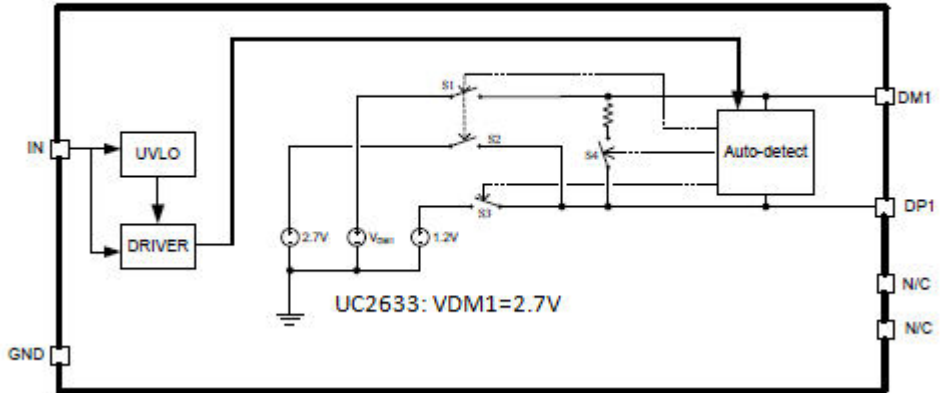

UC2634 Block Diagram

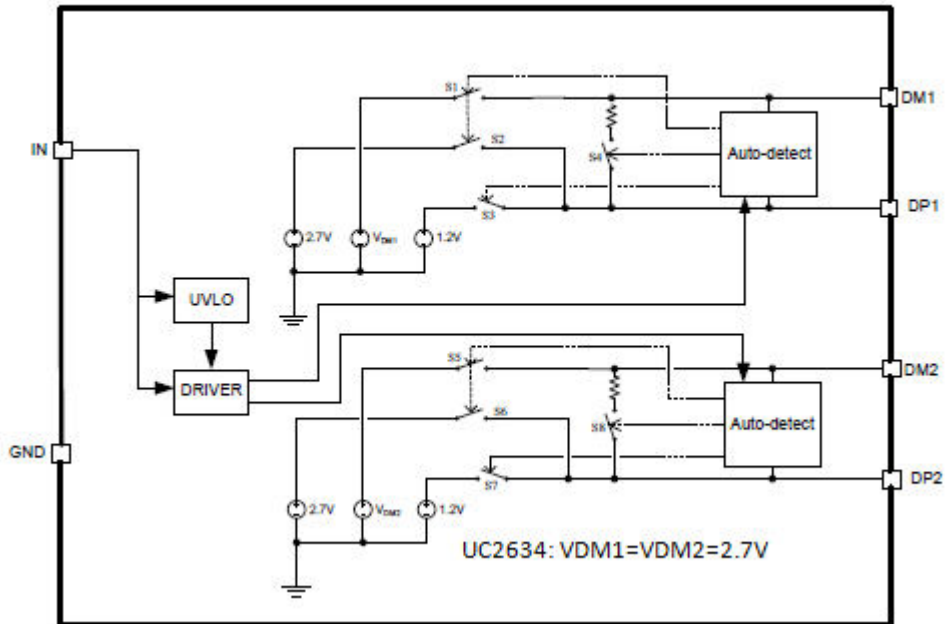

12W Single/Dual USB Charger Adapter Emulator

PACKAGE INFORMATION

SOT23-6

